

## FEATURES & BENEFITS

- Capacities from 2 to 100 kN (450K to 22.5K lbf)
- Short height
- Large thru-hole
- For press-force monitoring


## SPECIFICATIONS

ACCURACY – (MAX ERROR)		
Nonlinearity – %FS		±0.5
Hysteresis – %FS		±0.5
Non-repeatability – %RO		±0.1
Creep, in 30 min – %		±0.1
TEMPERATURE		
Effect on Zero – %RO / °C		±0.02
Effect on Output – %RO / °C		±0.02
Compensated Range	°C	0 to +60
	°F	+32 to +140
Operating Range	°C	-10 to +70
	°F	+14 to +158
ELECTRICAL		
Output – mV/V		1 ±20%
Excitation Voltage – VDC		2 - 12
Bridge Resistance – Ohm		700
Electrical Connection – Cable	m	3
	ft	10
MECHANICAL		
Safe Overload – %RO		150
Deflection at Rated Capacity	mm	< 0.15
	in	< 0.006
IP Rating		IP60
Material		Stainless steel / aluminum

## OPTIONS


- Extended temperature range (-40 to +150°C or -40 to +302°F)
- Internal shunt resistor – 100% output

## STANDARD CONFIGURATION

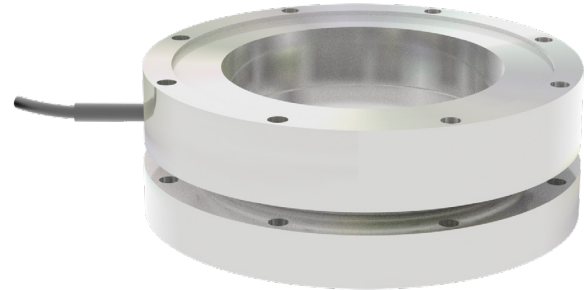


Model LWPF1 (shown)

## LOADING DIAGRAM

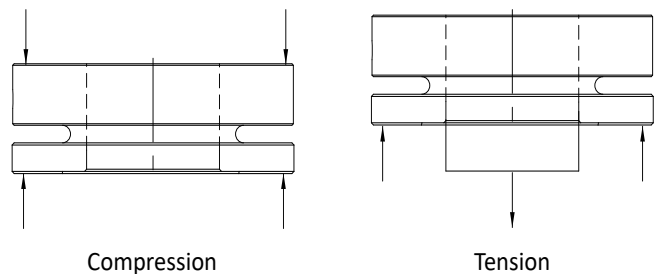

Compression

Tension

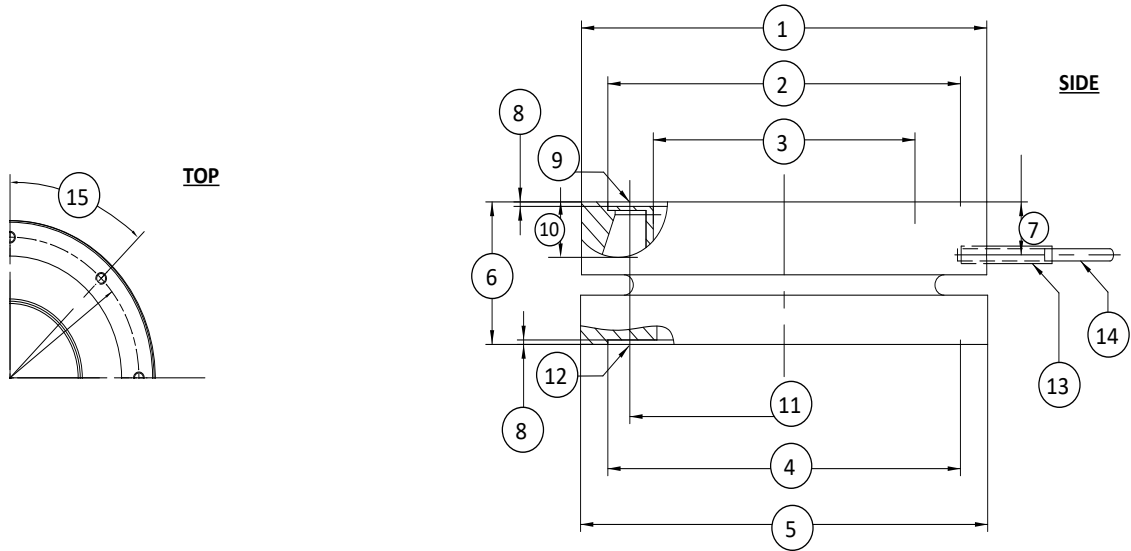

## DIMENSIONS

See Drawing	CAPACITY			
	Metric (kN)	US (lbf)	Metric (kN)	US (lbf)
	2, 5, 10, 20	450, 1.12K, 2.25K, 4.5K	50, 100	11.2K, 22.5K
	mm	in	mm	in
(1)	69.7	2.74	111.5	4.39
(2)	54	2.1	97	3.8
(3)	33	1.3	70	2.8
(4)	54	2.1	97	3.8
(5)	70g6	(2.7555/2.7548)	112g6	(4.4090/4.4081)
(6)	25	1.0	35	1.4
(7)	9	0.4	13	0.5
(8)	0.5	0.02	1.1	0.04
(9)	M5, 8 x 45°		M6, 8 x 45°	
(10)	5	0.2	6	0.2
(11)	62	2.4	104	4.1
(12)	M5, 8 X 45°		M6, 8 x 45°	
(13)	18 <sup>±3</sup>	0.7 <sup>±0.1</sup>	18 <sup>±3</sup>	0.7 <sup>±0.1</sup>
(14)	∅3.2	∅0.13	∅3.2	∅0.13
(15)	45°		45°	